

# FCSS-2


PART NO. FCSS-2 FORD CELLULAR SURROUND SOUND T-HARNESS  
FORD CELLULAR SURROUND SOUND T-HARNESS FOR USE WITH MOST MOTOROLA, NOKIA  
AND OTHER HANDS-FREE KITS WITH MUTE WIRE.

THIS HARNESS IS USED IN CONJUNCTION WITH THE PHONE SWITCH FEATURE ON MOST  
2003 AND LATER MODEL FORD PICKUPS AND SPORTS UTILITY VEHICLES.

WHEN THE HARNESS IS INSTALLED IT WILL, UPON ACTIVATION BY AN INCOMING OR  
OUTGOING CALL, AUTOMATICALLY MUTE THE RADIO AND PLAY THE CALL THROUGH THE  
FACTORY SOUND SYSTEM. "PHONE" OR "CALL" WILL APPEAR ON THE RADIO'S DISPLAY.

INSTALLATION INSTRUCTIONS (note: Eject all CD's from the indash radio and disconnect  
battery prior to the installation)

- REMOVE THE FACTORY RADIO TO GAIN ACCESS TO THE REAR OF THE RADIO.
- DISCONNECT THE POWER AND SPEAKER HARNESS FROM THE RADIO
- PLUG THE FCSS-2 HARNESS INTO THE RADIO AND PLUG THE OTHER ENDS INTO  
THE POWER AND SPEAKER HARNESS REMOVED FROM THE RADIO.
- PLUG THE 6 PIN CONNECTOR AND MINI CONNECTOR INTO THE MOTOROLA  
HANDSFREE KIT MODULE.
- NOTE: PRIOR TO DISCONNECTING THE RADIO EJECT ALL CD'S FROM THE IN  
DASH RADIO.

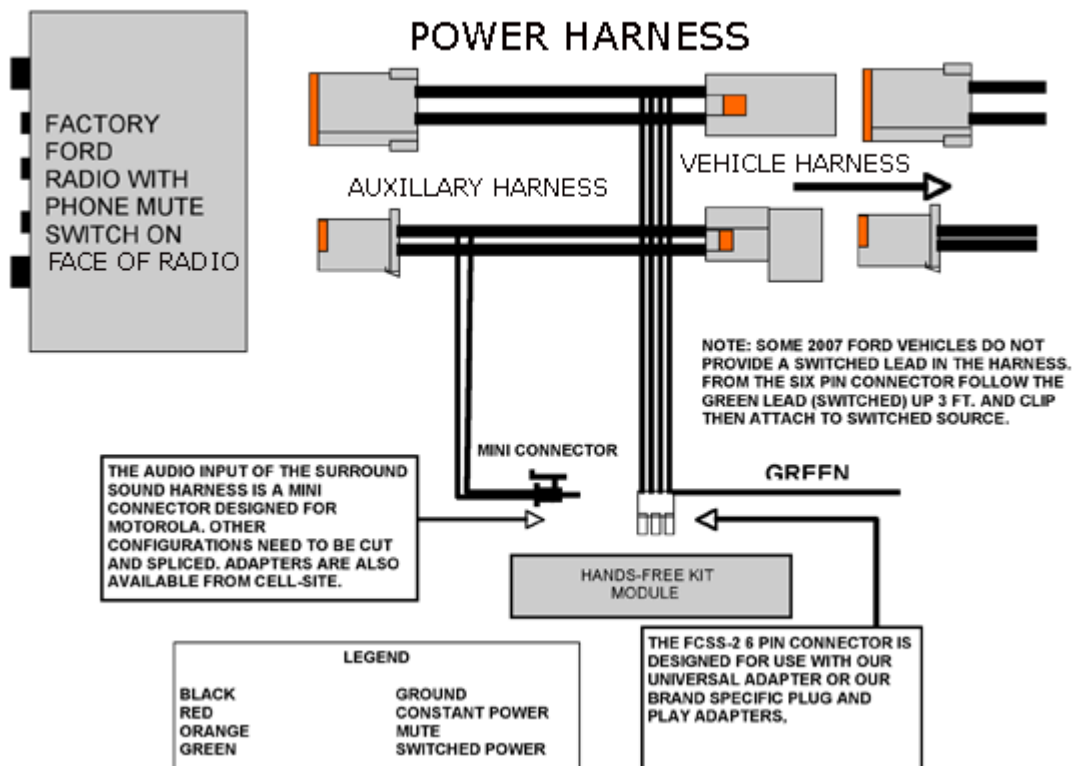

The speaker supplied with the MOTOROLA hands-free kit is optional. If the Ford radio has only a single harness you must still plug the FCSS-2 harness into both connectors in the rear of the radio to complete the circuit through the radio. The connectors on the radio end of the FCSS-2 are a snug fit.

FOR IMPROVED PHONE CALL CLARITY REDUCE THE CELLULAR PHONE VOLUME SETTINGS TO ALLOW GREATER INCREMENTAL VOLUME ADJUSTMENT VIA THE VEHICLES RADIO CONTROLS. PART NO. LOC-1 LINE OUTPUT CONVERTER CAN BE USED IN LINE TO IMPROVE SOUND QUALITY. THE LINE OUTPUT CONVERTER SHOULD BE USED IN ALL NEXTEL INSTALLATIONS. IT IS RECOMMENDED THAT ALL INSTALLATIONS BE FUSED.



43 Shinnecock Rd. Dover, DE 19904  
Phn: 888-820-4838 Fax: 302-526-4334  
Email: [sales@celltechsolutions.net](mailto:sales@celltechsolutions.net)  
Web: <http://www.celltechsolutions.net>