

GMCSS-3A

CELLULAR SURROUND SOUND HARNESS FOR MOST 2007-2008 GENERAL MOTORS TRUCKS AND SUVs

This combination protocol device and integration harness is designed to communicate with the new General Motors high speed LAN. The GMCSS-3A will easily integrate virtually any hands-free kit into the factory sound systems of the 2007 and 2008 General Motors trucks and SUVs with or without Onstar. The results are these great features.

- Mutes the factory radio whenever you make or receive a phone call.
- Takes the cellular phones audio and plays it through the factory sound system.
- The word "phone" or the phone symbol will appear on the radios display.
- The volume controls on the steering wheel and radio remain fully functional and control the volume of the phone call.
- The protocol device provides you a switched lead, no more hunting under the dash.

INSTALLATION INSTRUCTIONS: EJECT ALL CDS' FROM THE IN DASH RADIO.

Remove the ignition key and open the drivers door.


Remove the factory radio to gain access to the radio harness plugged into the back.

Disconnect the harnesses (not the antenna plug).

Plug the corresponding GMCSS-3 harness plugs into the rear of the radio and plug the other end into the harness that formerly plugged into the radio.

Plug the mini connector and the six pin connectors (designed to plug and play into some Motorola kits) into the hands-free kit module.

We recommend using our LOC-1 line output converter in all installations

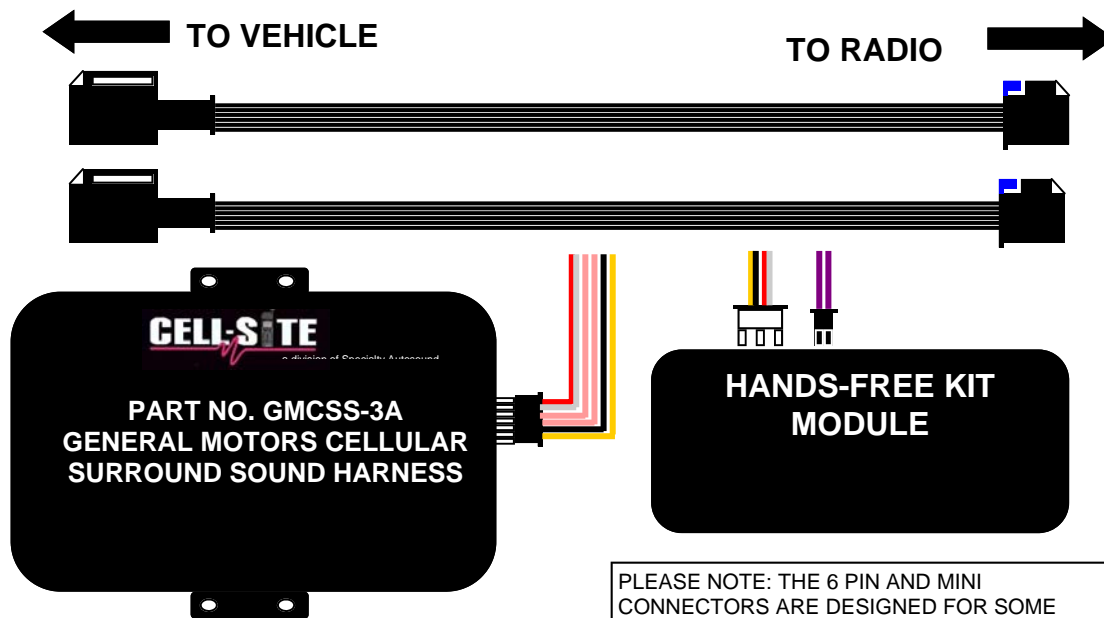

6 PIN COLOR LEGEND

BLACK:	GROUND
RED:	SWITCHED
YELLOW:	POWER
GREY:	MUTE

Face view of
mini connector



Pos. Neg.